



Danholm

To live up to the high insulation demands of today we have sourced this high insulating outward opening door with triple glazing. The door can be delivered with glass that has a unique low Ug-Value of only 0.5. The door is delivered with adjustable warm galvanized hinges and safety espagnolette lockingbox as standard (handles, plates and cylinder are optional).

To maintain the high insulating power of the door it is, with the selection of bars, only possible with 22 mm simulated bars without spacers between the panes.




Double door




Front door


T1200

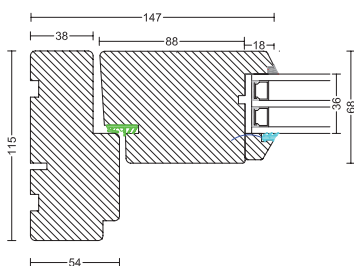


O1203

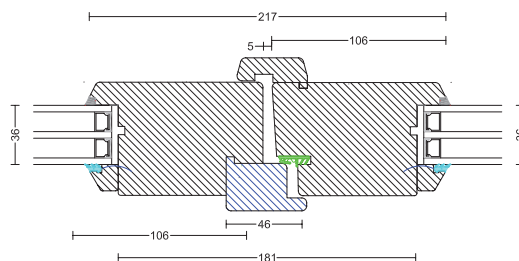


T1200

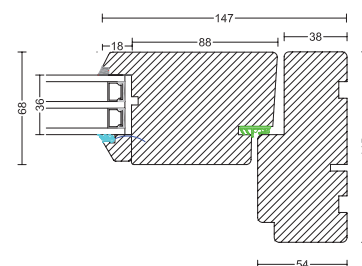

A1202

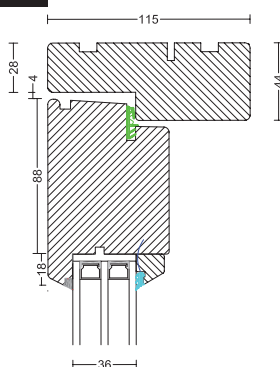

1201

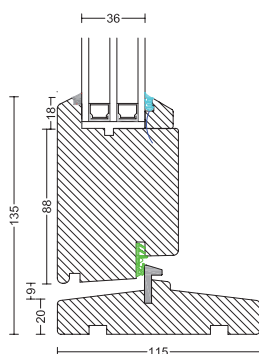

Measurements:

	Width	Height	Area
Front door	Min. 503 mm Maks. 1.098 mm	Min. 1.818 mm Maks. 2.398 mm	2,6 m ²
Double door	Min. 1.053 mm Maks. 2.098 mm	Min. 1.818 mm Maks. 2.398 mm	4,5 m ²